

Excel in Your Field™

Specifications

CATEGORY	XR3135	XR3135H	XR3135C	XR3135HC	XR3140HC
ENGINE					
Type	Vertical Water-Cooled 4Cycle Diesel Engine				
Model(Tier4)	L3C19-T				
Engine HP(Gross)	35				
PTO HP	29.7	28.0	29.7	28.0	40
Rated speed, rpm	2,600				
Displacement-cu, in ³	114.7				
Fuel tank capacity, gal.	10.6				12.4
Alternator(V-A)	12 - 70				
DRIVE TRAIN					
Transmission	Synchro shuttle	HST	Synchro shuttle	HST	HST
No. of Speed	F12 x R12 (GEAR) / 3 Ranges (HST)				
Brakes	Wet, Multi - disc				
Steering	Hydrostatic Power Steering				
PTO					
Type	Independent				
Rear, rpm	540				
Mid PTO(Option)	2,000				
HYDRAULIC SYSTEM					
Control system	Position / Draft				
Implement pump, gpm	8.2				
Steering pump, gpm	4.1 (GEAR) / 5.5 (HST)				
Total flow, gpm	12.3 (GEAR) / 13.7 (HST)				
Category, 3pt hitch	CAT I				
Hitch Lift capacity, lbs(Hitch end)	1,808				
Remote valves	2 Pairs (Front) / 2 Pairs (Rear)				
DIMENSION					
Overall length, Bumper to link in.	128.3				
Overall width with tires, in.	62				
Wheelbase, in.	69				
Ht to top of rops / cab., in.	94				86.6
TIRE SIZE					
Ag Front / Rear	7 - 14 / 11.2 - 24				
IND Front / Rear	25 x 8.5 - 14 / 43 x 16 - 20				
Turf Front / Rear	25 x 8.5 - 14 / 41 x 14 - 20				
WEIGHT					
Total weight without ballast, lbs.	3,175	3,285	3,589	3,655	3,661

Note Specifications and design are subject to change without prior notice.

Get More Standard Features

- Dry-type air cleaner
- Pre-heat starting aid
- Hand and foot throttle control
- Instrumentation-alternator
- Warning and engine oil pressure light
- Remote control valves (2 pairs)
- Hydrostatic power steering
- Front loader valve and joystick
- Hydraulic draft and position control
- Adjustable seat
- Extendable lower links and telescopic stabilizers
- Drawbar
- Turn signals
- Safety flashers
- Rear wiper

LS Tractor USA

LS Tractor USA | 6900 Corporation Parkway, Battleboro, NC
P: 252.984.0700 | F: 252.984.0701 | www.lstractorusa.com

Dealer Imprint Zone



39000938-1901

LS Tractor

XR3100 Series

XR3135 / XR3135H / XR3135C / XR3135HC / XR3140HC
Premium Compacts




Excel in Your Field™

- Eco-friendly TIER 4 35/40HP engine
- 6 year warranty*
- 12F x 12R fully synchronized shuttle shift or 3 range HST with cruise control
- Front wheel mechanical assist 4WD
- Choice of industrial, ag or turf tires at no additional cost
- Available with quick attach skid steer compatible front end loader with grill guard
- Available sub frame mounted, quick attach 7' backhoe
- Optional mid-mount PTO

*6-year limited warranty. See dealer for details

XR3100 Series Premium Compacts

Excel in Your Field™

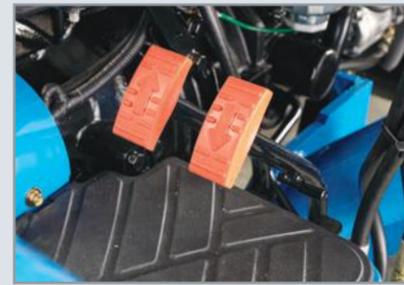

Hydrostatic transmission models

Maximizes ease of use with effortless, clutchless and instant speed and directional changes with a simple push of the pedals



Flat platform

With rubber mat and side mounted gear lever, maximizes space, improves operator comfort, and makes getting on/off tractor easier



PTO switch

Turn the independent PTO on or off with a simple switch



New LS Tier 4 CRDI Engine

Meets EPA's most stringent emission standards while delivering rated horsepower quietly with low vibration



Easy open one-piece hood

Provides accessibility for easy maintenance



2 sets of remotes and detent function standard

Adds functionality and improves ease of use by allowing attachment of hydraulically controlled implements without the high, additional costs like others in its class to add the remotes as options



Your choice of tires

Choose ag, industrial, ag or turf tires at no additional cost



Full function dash panel

Important functional data is available at a glance for optimum performance and control



Deluxe adjustable seat with retractable seat belt and arm rests

Keeps you safe and comfortable even during long operations